



CORRODUR

ANTICORROSIVE PRIMER OF FAST DRYING.

Acrylic resins compound of high anticorrosive power with a fast drying and an exceptional covering capacity which distinguishes the product by its high performance. CORRODUR is compatible with epoxy, polyurethane and synthetic finishing.

USES

Acrylic resins compound of high anticorrosive power with a fast drying and an exceptional covering capacity which distinguishes the product by its high performance. CORRODUR is compatible with epoxy, polyurethane and synthetic finishing.


SURFACE PREPARATION

In all cases the surface must be exempt of rust and clean of greases.

INSTRUCTIONS FOR USE

To apply it with brush it is necessary to dilute the product with our solvent DILUYENTE N°1 at a rate of 10%. If it is applied with spray-gun the recommended dilution is at 20%.



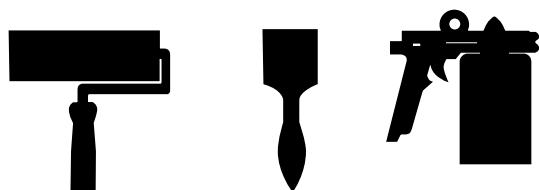

CONSUMPTION

Aproximadamente 8-10 m²/Kg.

COLOURS

Red, grey and black.

PACKING AND STORING

CORRODUR is packed in hermetic barrels of 6 Kg., according to EC packing and storing directives for chemical products. Professional use.

HYGIENE AND SAFETY

See product label.

SPECIFICATIONS	
Viscosity at 25°C:	15 p approx.
Dry extract:	65 ± 5%
Aspect:	Glossy matt
Especific weight:	1,31 ± 0,03 g/cm ³
Milling fineness:	5 (North Escale)
Stability:	viscosity does not vary in hermetic container.
Dry-to-touch:	25 ± 5 minutes
Total dry:	90 minutes
Adherence:	100%
Flexibility:	bending over a mandrel of 12 mm. The product does not get detached nor cracks.